

## Extraction Hood

Geovent manufactures hoods in customised or standard versions. They are available with different kinds of suspension types, depending on the installation plans – on a wall or from the ceiling. The airflow can be adapted to the individual job by adjusting the width of the slit as well as the diameter measurement of the connection to the Spiro pipe.


As standard, we offer two sizes: hood 1275 x 700 x 250 mm with an airflow from 100 m<sup>3</sup>/h and 2550 x 700 x 250 mm with an airflow from 200 m<sup>3</sup>/h and upwards. These hoods have LED spots. As standard, the slite is 20 mm. Upon request, the slite can be made in different measurements. As shown on the picture, the hoods can be installed in series, making an almost endless length of the actual hood possible.



### Ordering table

Art. No.	Description
02-212	Hood 1275 x 700 x 250 mm, LED spots
02-213	Hood 2550 x 700 x 250 mm, LED spots

### Dimensions

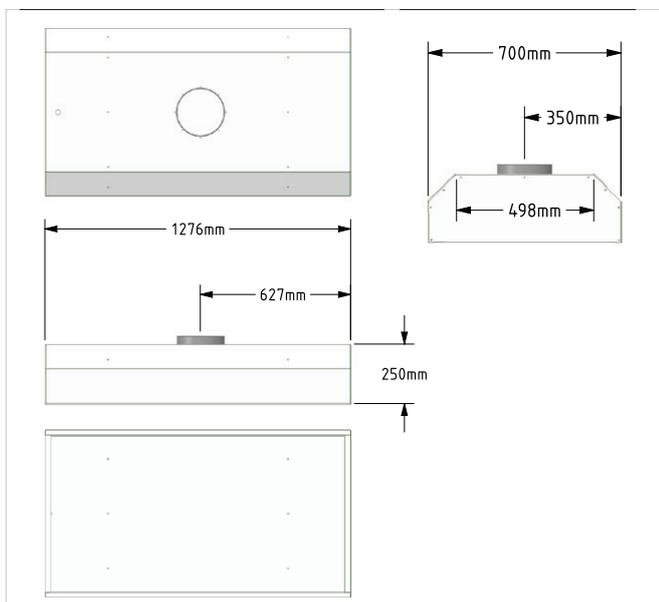


02-212 Hood



Hood with light

### Dimensions

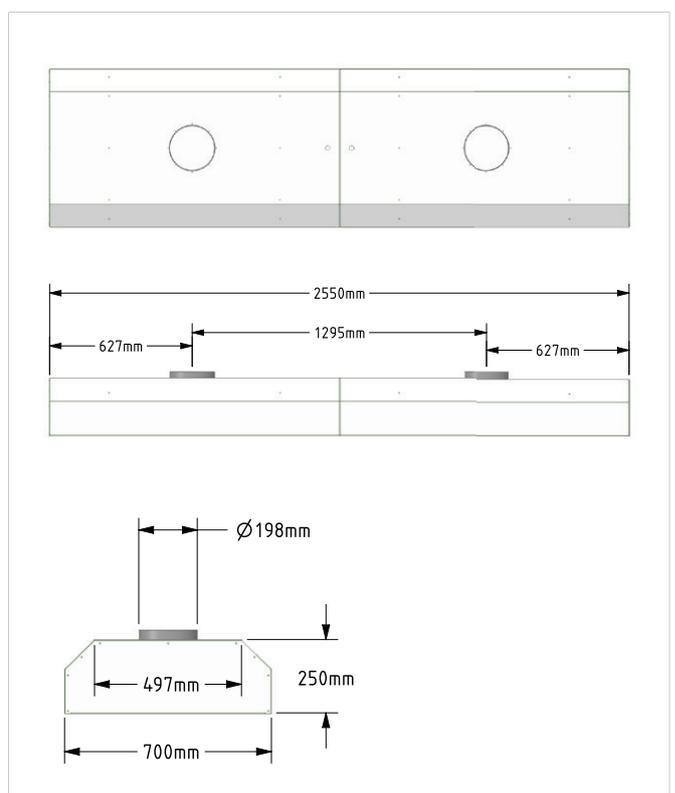

02-213 Hood