




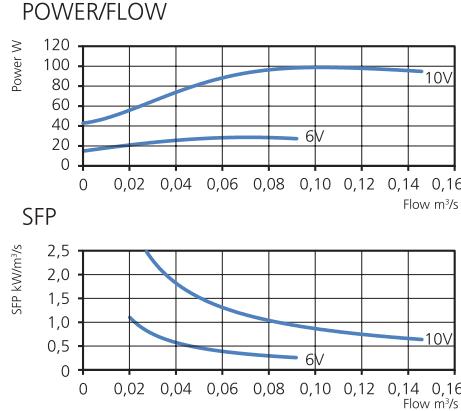


- Wall fan with circular inlet connection.
- KV has a square mounting plate.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Suitable for a wide variety of applications.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.

- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system, mounted on the inside wall.
- Easy installation in any position.
- Can be used in damp environments.

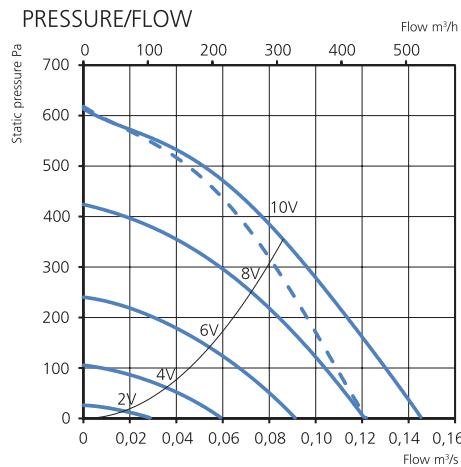

— Without duct

DIMENSIONS

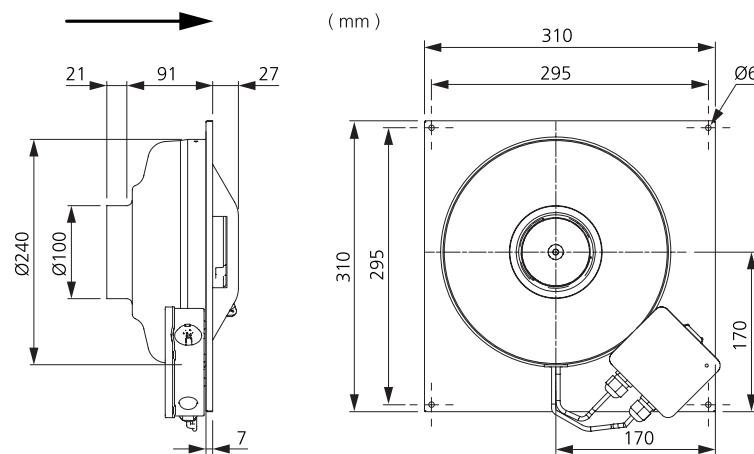

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	0.83 A
Power	98 W
Speed	3590 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	52 dB(A)
Weight	2.7 kg
Enclosure class	44 IP
Wiring diagram	4040153

ACCESSORIES

- Mounting clamp MK 100
- Safety grille BSV 100
- Safety grille BSR 250
- Back draught shutter RSK 100
- Louvre YG 250
- Louvre shutter VK 250
- Silencer LDC 100
- Speed controller MS EC
- Controller IQ-Reg EC
- Plejd Controller
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	59	25	48	45	53	54	53	46	35
Outlet 10 V	81	44	51	60	71	78	77	68	59
Inlet 10 V	79	57	63	75	74	69	68	66	58
Inlet 8 V	75	55	60	72	70	65	63	61	53
Inlet 6 V	69	50	54	67	62	56	54	52	39
Inlet 4 V	58	46	46	56	51	44	42	36	20
Inlet 2 V	40	31	30	38	33	22	13	15	6

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.