


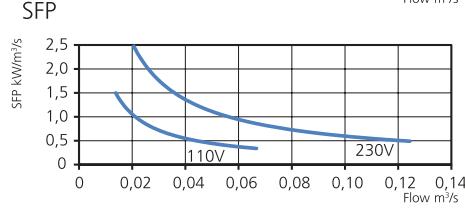


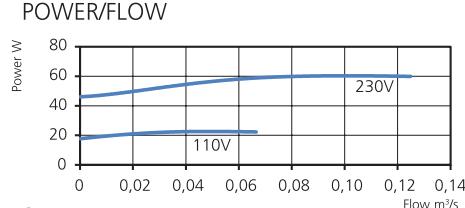

- Wall fan with circular inlet connection.
- KV has a square mounting plate.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Suitable for a wide variety of applications.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system, mounted on the inside wall.
- Easy installation in any position.
- Can be used in damp environments.
- To comply with the ErP 2018 regulation, a local demand controller must be used.

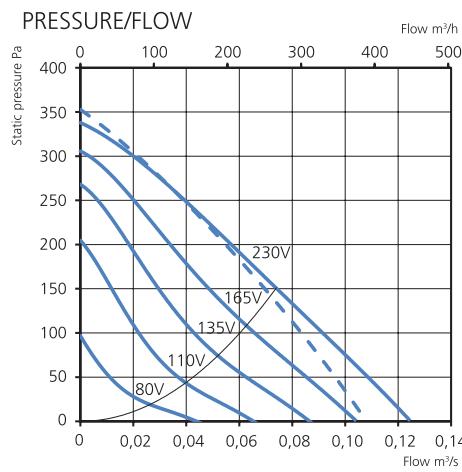

DIMENSIONS

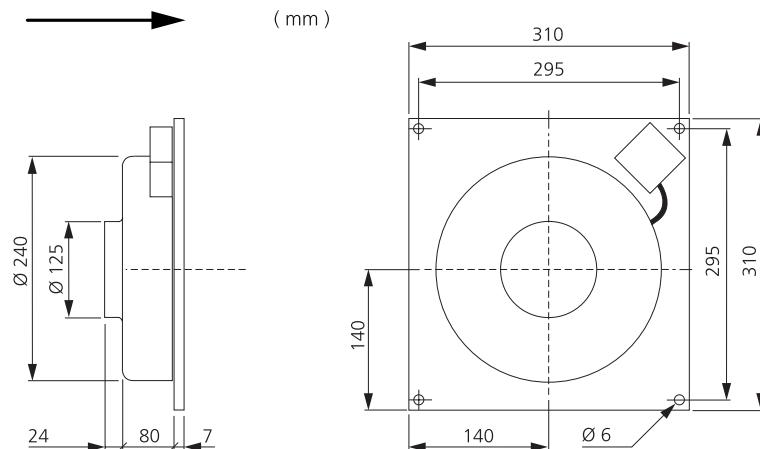

TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.26 A
Power	60 W
Speed	2520 r.p.m.
Max. temp of transported air	80 °C
Sound pressure level, 3 m	44 dB(A)
Weight	2.5 kg
Enclosure class	44 IP
Wiring diagram	4040001

ACCESSORIES

- Mounting clamp MK 125
- Safety grille BSV 125
- Safety grille BSR 250
- Back draught shutter RSK 125
- Louvre YG 250
- Louvre shutter VK 250
- Silencer LDC 125
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 0.5
- Local Demand Controller Kit

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	51	25	30	44	44	46	44	39	31
Outlet 230 V	65	33	39	49	56	62	60	55	45
Inlet 230 V	68	51	57	62	63	59	58	58	51
Inlet 165 V	64	49	54	59	59	54	53	53	44
Inlet 135 V	59	47	51	54	54	49	48	46	36
Inlet 110 V	53	45	46	48	47	42	39	37	24
Inlet 80 V	43	36	37	37	35	28	21	21	16

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.