





- Wall fan with circular inlet connection.
- KV has a square mounting plate.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Suitable for a wide variety of applications.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system, mounted on the inside wall.
- Easy installation in any position.
- Can be used in damp environments.


PRESSURE/FLOW

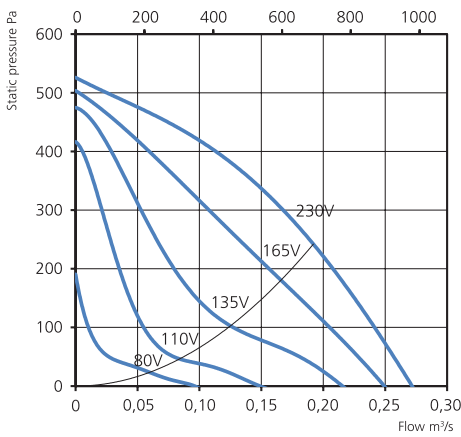

POWER/FLOW

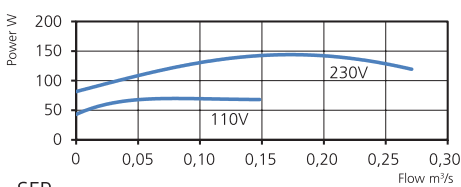

SFP

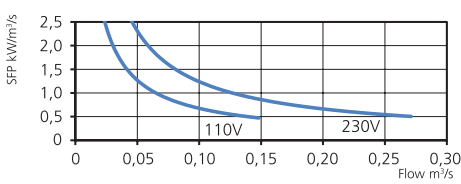

TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.63 A
Power	144 W
Speed	2720 r.p.m.
Max. temp of transported air	80 °C
Sound pressure level, 3 m	45 dB(A)
Weight	4.4 kg
Enclosure class	44 IP
Wiring diagram	4040001

ACCESSORIES

- Mounting clamp MK 200
- Safety grille BSV 200
- Safety grille BSR 355
- Back draught shutter RSK 200
- Louvre shutter VK 355
- Silencer LDC 200
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	52	26	34	41	46	48	44	44	35
Inlet 230 V	75	56	63	70	69	66	64	62	59
Inlet 165 V	71	52	61	67	65	63	61	59	55
Inlet 135 V	65	47	55	61	57	54	54	54	40
Inlet 110 V	55	39	52	48	46	42	43	32	23
Inlet 80 V	49	35	47	41	36	32	25	15	14

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

