

NON INSULATED WALL FAN WITH CIRCULAR CONNECTIONS

RS 160 A1 EC

7400044

- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.




ACCESSORIES

- Back draught shutter RSK 160
- Silencer LDC 160
- Speed controller MS EC
- Controller IQ-Reg EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R


TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	0.82 A
Power	98 W
Speed	3570 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	68 dB(A)
Weight	3.1 kg
Enclosure class	44 IP
Wiring diagram	4040153


PRESSURE/FLOW

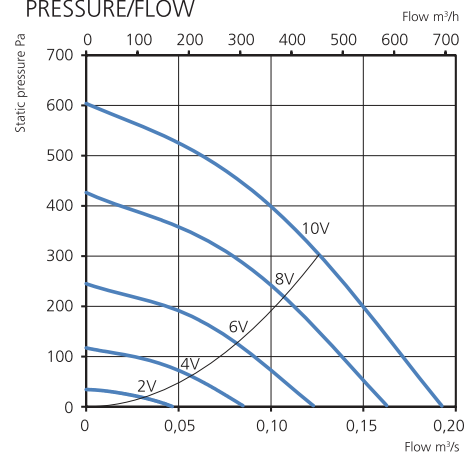

POWER/FLOW

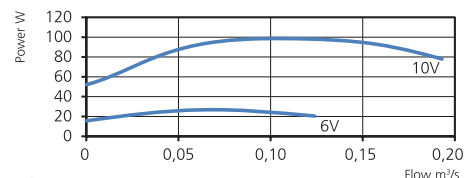

SFP

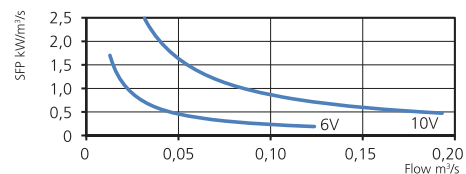

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	75	46	51	64	70	69	70	64	58
Inlet 10 V	78	63	68	70	74	68	68	63	61
Inlet 8 V	73	61	65	66	68	63	64	59	55
Inlet 6 V	66	55	58	59	61	56	56	53	42
Inlet 4 V	56	48	48	48	51	46	49	37	25
Inlet 2 V	39	32	32	32	36	27	20	14	5

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS (mm)

