

NON INSULATED WALL FAN WITH CIRCULAR CONNECTIONS

RS 200 B1 EC

7400046

- Exhaust wall fan with circular inlet connection.
- Designed for mounting on external wall.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Integrated motor protection.

- Junction box has enclosure class IP 54.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Fan housing is manufactured from galvanized sheet steel.
- Black painted for high durability.



ACCESSORIES

- Back draught shutter RSK 200
- Silencer LDC 200
- Speed controller MS EC
- Controller IQ-Reg EC
- Plejd Controller
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	1.37 A
Power	166 W
Speed	3070 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	73 dB(A)
Weight	5.6 kg
Enclosure class	44 IP
Wiring diagram	4040153

SOUND DATA


	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	80	48	53	62	75	73	74	71	61
Inlet 10 V	77	60	62	65	73	68	70	69	66
Inlet 8 V	76	60	61	64	72	67	69	68	65
Inlet 6 V	70	52	55	60	66	61	62	60	59
Inlet 4 V	60	43	47	54	54	51	52	48	42
Inlet 2 V	43	29	37	35	38	32	31	24	14

MORE INFORMATION




Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.


PRESSURE/FLOW

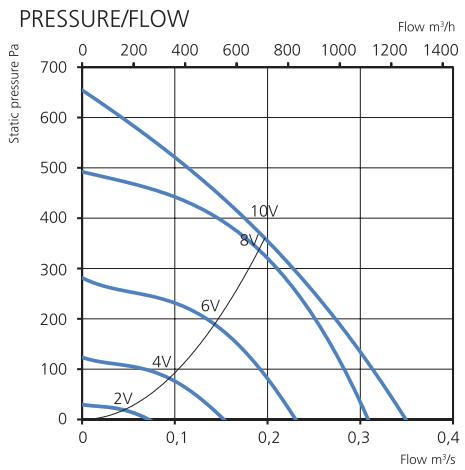

POWER/FLOW

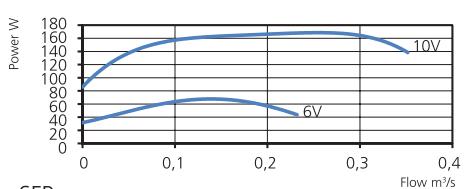

SFP

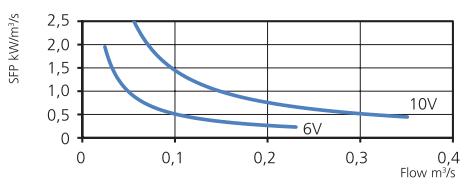

DIMENSIONS

(mm)

