





- Roof fan with square connection.
- Horizontal outlet.
- High performance and proven reliability.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb, TFU to TKS.
- The fan complies with environmental requirement M2.


### PRESSURE/FLOW

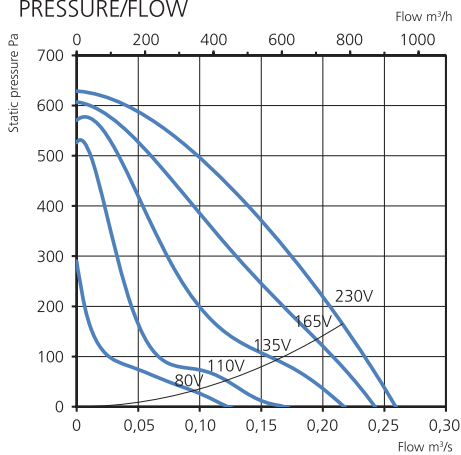

### POWER/FLOW

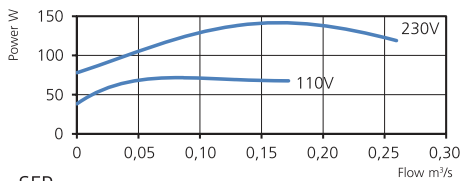

### SFP

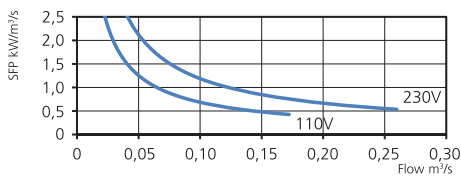

### TECHNICAL DATA

|                              |               |
|------------------------------|---------------|
| Voltage                      | 230 V         |
| Frequency                    | 50 Hz (60 Hz) |
| Phase                        | 1 ~           |
| Current                      | 0.62 A        |
| Power                        | 141 W         |
| Speed                        | 2760 r.p.m.   |
| Max. temp of transported air | 80 °C         |
| Sound pressure level, 3 m    | 63 dB(A)      |
| Weight                       | 6.7 kg        |
| Enclosure class              | 44 IP         |
| Wiring diagram               | 4040001       |

### SOUND DATA

|                   | L <sub>WA</sub> tot dB (A) | 63 | 125 | 250 | 500 | 1K | 2K | 4K | 8K |
|-------------------|----------------------------|----|-----|-----|-----|----|----|----|----|
| Surrounding 230 V | 70                         | 39 | 47  | 59  | 63  | 65 | 63 | 58 | 56 |
| Inlet 230 V       | 74                         | 60 | 63  | 66  | 69  | 66 | 63 | 63 | 64 |
| Inlet 165 V       | 71                         | 56 | 60  | 63  | 64  | 62 | 59 | 61 | 61 |
| Inlet 135 V       | 66                         | 50 | 54  | 57  | 57  | 55 | 53 | 64 | 40 |
| Inlet 110 V       | 59                         | 41 | 55  | 46  | 47  | 43 | 57 | 36 | 23 |
| Inlet 80 V        | 48                         | 36 | 46  | 38  | 37  | 36 | 32 | 17 | 14 |

### Available in following design:

|           |         |
|-----------|---------|
| Black     | 7210026 |
| Brick red | 7210034 |

### MORE INFORMATION



Find out the latest updated information about this product by visiting [www.ostberg.com](http://www.ostberg.com) or scanning this QR code.

### DIMENSIONS (mm)

