





- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.
- The fan complies with environmental requirement M2.

## PRESSURE/FLOW

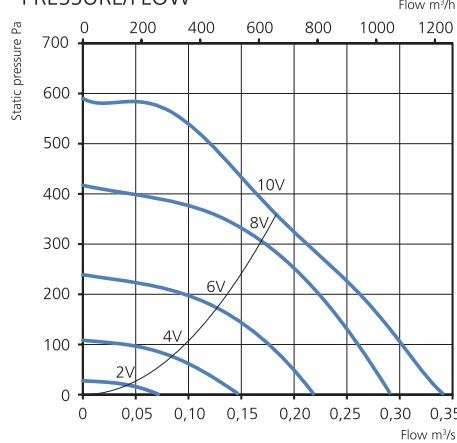


## POWER/FLOW

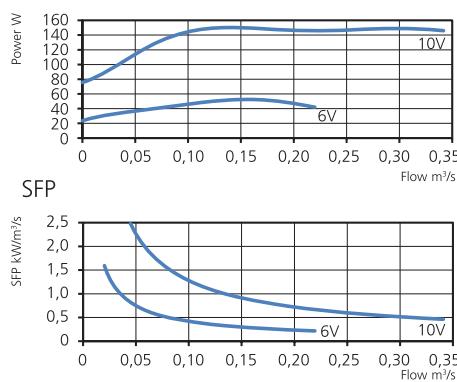

## DIMENSIONS (mm)

( mm )

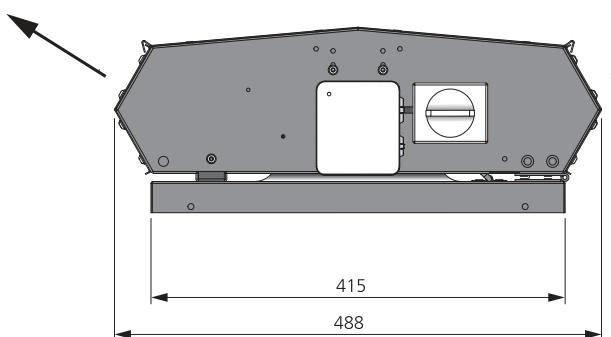

## MORE INFORMATION



Find out the latest updated information about this product by visiting [www.ostberg.com](http://www.ostberg.com) or scanning this QR code.

## TECHNICAL DATA

Voltage	230 V
Frequency	50/60 Hz
Phase	1 ~
Current	1.21 A
Power	150 W
Speed	2960 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	70 dB(A)
Weight	7.8 kg
Enclosure class	44 IP
Wiring diagram	4040153

## SOUND DATA

	L <sub>WA</sub> tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	77	50	53	64	70	69	73	65	56
Inlet 10 V	74	58	62	68	68	66	68	64	57
Inlet 8 V	73	57	60	67	66	64	67	62	55
Inlet 6 V	67	52	55	62	60	58	59	53	45
Inlet 4 V	57	42	50	49	52	49	47	41	29
Inlet 2 V	41	34	35	36	36	29	21	19	6

## Available in following design:

Tegelröd	7340137
Galvanized	7340136

