

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 660 B3 EC

7351024

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- Speed controlling can be done with the built-in potentiometer, 0-10 V alt. external control.
- Integrated motor protection.

- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.



ACCESSORIES

- Roof curb TFU 660
- Connection plate TFU 660
- Back draught shutter TFU 660
- Controller IQ-Reg EC
- Speed controller MS EC
- Pressure regulator CALAIR-PR-230V
- Pressure regulator FKP-R

TECHNICAL DATA

Voltage	400 V
Frequency	50/60 Hz
Phase	3 ~
Current	2.34 A
Power	1520 W
Speed	1800 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	79 dB(A)
Weight	40.9 kg
Enclosure class	54 IP
Wiring diagram	4040147

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 10 V	86	54	67	78	80	80	77	73	70
Inlet 10 V	87	68	75	82	82	79	76	72	72
Inlet 8.5 V	84	66	75	77	79	75	72	69	70
Inlet 7 V	79	62	71	73	73	70	66	62	65
Inlet 5 V	71	60	64	64	64	59	57	60	44

MORE INFORMATION





Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:


Black C4	7351044
Galvanized	7351004

DIMENSIONS (mm)


(mm)

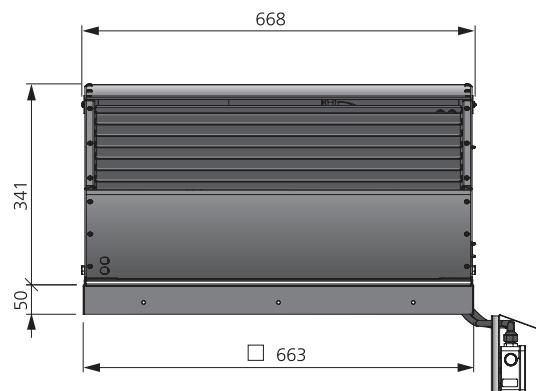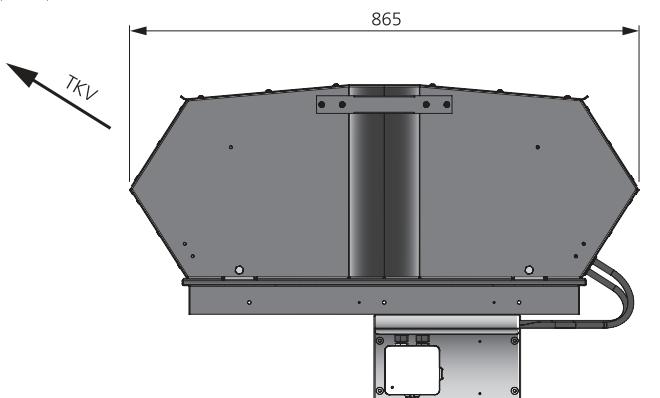

PRESSURE/FLOW

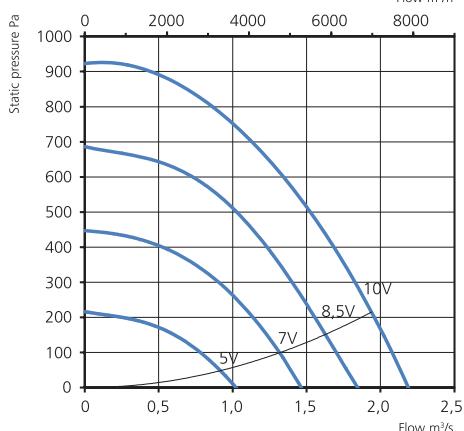

POWER/FLOW

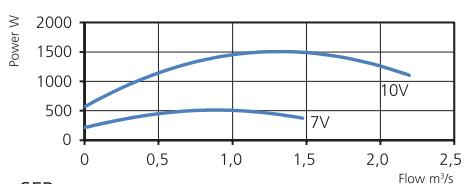

SFP

