

RADIAL FAN

DFE 133-20

7700267

DFE 133-20 WIRED WITH BOX

- Double inlet radial fan.
- High pressure, large air volumes and low sound levels.
- Impeller with forward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- The motor is situated in the airstream to get ultimate cooling.
- Integrated motor protection.

- Can be ordered with junction box.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- Compact design for a minimum amount of space.
- Ideal for use in heat exchangers, dehumidifiers and air cleaners.




ACCESSORIES

- Transformer controller VRDE 1.5
- Speed controller VRS 1.0
- Transformer controller VRTE C

TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.64 A
Power	147 W
Speed	1144 r.p.m.
Max. temp of transported air	55 °C
Sound pressure level, 3 m	60 dB(A)
Weight	3.7 kg
Enclosure class	44 IP
Wiring diagram	4040001


PRESSURE/FLOW

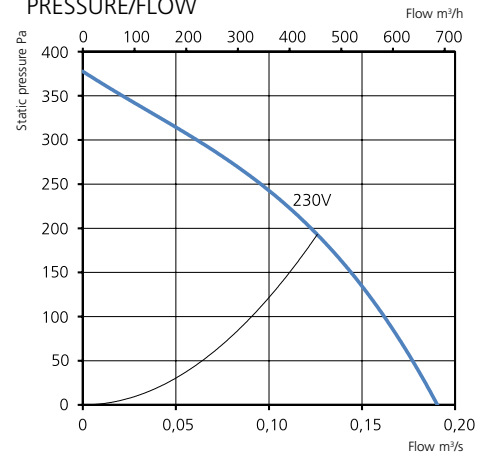


SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	67	42	49	54	58	62	61	57	50
Outlet 230 V	74	55	58	54	58	71	67	64	57

POWER/FLOW

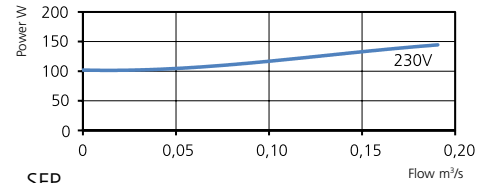

SFP

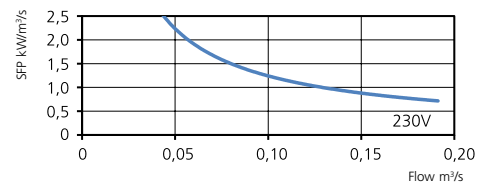

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

